

# RINK



Breaking barriers to better turf.

## DISC SPREADERS



*Models DS 800-DS 1200  
DS 3800*



The Rink Disc Spreaders are topdressers that spread material accurately using two spinner discs.

They are ideal to sand-dust turf area's, even when the material used is moist.



DS 1200

# Rink Disc Spreaders

Model	DS 800 towed	DS 1200 towed
Spreading width	2 to 12m (6½-40ft) variable	
Spreading thickness	0.5 to 15mm (0.02-0.60")	
Weight	460kg (1014lb)	490kg (1080lb)
Dimensions (length x width x height)	3.52 x 1.51 x 1.39m (11.5 x 5 x 4.6ft)	3.52 x 1.66 x 1.74m (11.5 x 5.4 x 5.7ft)
Hopper capacity	0.8cu.m (28cu.ft) level	1.2cu.m (42cu.ft) level
Tractor size	25hp +: double acting hydraulic valve and min. oil supply of 25lt/minute by 140 bar (2031psi)	25hp +:
Optional:	Conveyor belt	

The Rink DS Disc Spreaders are topdressers with dual spinners and a variable spread pattern of up to 12m (DS 3800: 15m) wide. The operation of the belt and spinners can be done from the tractor seat by switching the hydraulic lever. No unnecessary drop of material takes place between stopping and operation, since the material release gate automatically closes when the belt is stopped. The spinner discs have been designed in a way that they will handle wet material very well.




DS 800

The Rink DS 800 has a smaller hopper capacity



The dual spinners can be accurately adjusted for different materials: from very heavy to extremely fine material.

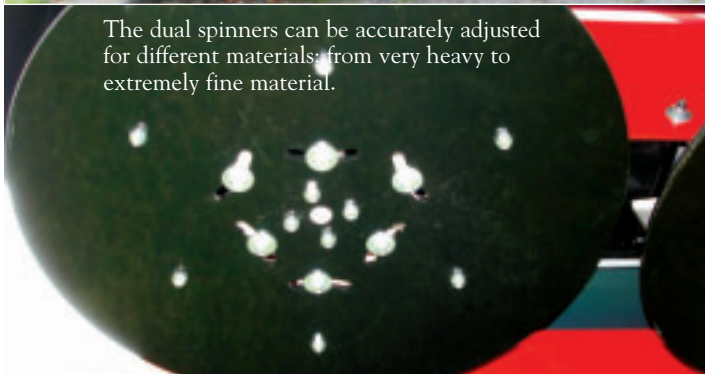

The DS 1200 is standard supplied on large tyres (only pictured here)

# Technical Specifications

## DS 3800 towed

2 to 15m (6½-49ft)  
0.5 to 15mm (0.02-0.60")  
1800kg (3968lb)  
5.10 x 2.42 x 2.20m  
(16.7 x 7.9 x 7.2ft)  
3.8 cu.m (125 cu.ft) level  
60hp  
with single acting valve  
or brake valve  
Conveyor belt

## DS 800 for utility vehicle- carried

2 to 12m (6½-40ft) variable  
0.5 to 15mm (0.02-0.60")  
440kg (970lb) incl. sub frame  
2.52 x 1.33 x ±0.90m  
(8.3 x 4.4 x ±3ft)  
0.8 cu.m (28 cu.ft) level  
Utility vehicle required with OEM  
external oil pump with min. oil supply  
of 25l/minute by 140 bar (2031psi)  
Conveyor belt  
Jack stand



The DS 3800 spreads the material up to 15m (6½ ft) wide



All control functions are operated by the DS 3800's own hydraulics. There are no electrical controls, so that the risks of short circuits are avoided

# Disc Spreaders for utility vehicles



The Rink DS 800 can be carried either on top of the utility vehicle (above) or be pulled (below)



The Jack stand makes it easy to mount and to store the DS 800



Breaking barriers to better turf.