

Redexim 

# VERTI-SEED


# 804/1204



The Verti-Seed's unique action first opens the turf using special oval shaped discs followed by small chisels. The seed is then fed through the seeding funnel and released just above the slit where the wind cannot blow it away. The seed is deposited in the furrow accurately and can be precisely adjusted to give you exact rates even for very fine seed, like bents and fescues. The furrow is then sealed by the seeding shoe. Each seeding element is independently sprung, enabling the Verti-Seed to accurately seed on any ground contour.



# VERTI-SEED 804/1204

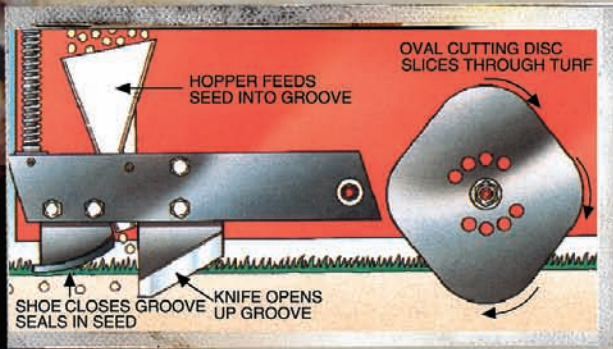

- Metal tubes feed seed funnels before releasing seeds into slits
- The adjustable rear storage stand ensures the correct height for easy 3-point hitch connection



## WORKING SPECIFICATIONS

Model	804	1204
Working width	32" (0.8m)	48" (1.2m)
Working depth	Up to 1.5" (30 mm)	Up to 1.5" (30 mm)
Weight	990 lbs (450 Kg)	1,300 lbs (590 Kg)
PTO Speed	Up to 540 rpm	Up to 540 rpm
Tire Pressure	14 to 28 psi (1 to 2 bar)	14 to 28 psi (1 to 2 bar)
Spacing side-to-side	1.5" (40 mm)	1.5" (40 mm)
Recommended minimum tractor size	17 HP (12.6 kW) with lift capacity of minimum 1,300 lbs (600 Kg)	22 HP (16.4 kW) with lift capacity of minimum 1,650 lbs (750 Kg)
Capacity	Up to 5 mph (8 km/hour) 64,583 sq ft (6,000 sq m)/hour	Up to 5 mph (8 km/hour) 107,639 sq ft (10,000 sq m)/hour
Hopper Capacity	3.35 cu ft (0.6 cu m)	5.1 cu ft (1.0 cu m)
Shipping dimensions	46" x 24" x 44" L x W x H (1.15m x 0.6m x 1.1m)	62" x 24" x 44" L x W x H (1.55m x 0.6m x 1.1m)
Three point linkage	3-point CAT 1	3-point CAT 1
Lubrication grease	EP 2	EP 2
Standard items	Manual Support jack	Manual Support jack

## FEATURES / BENEFITS

FEATURE	BENEFIT
Close 1/16" (40mm) spacing between drills	Less passes for same density
Floating seeding elements	Rows grow in quicker and lines less visible
Fits compact tractor's 3-point linkage	Ideal for fine turf areas
Each seed planted individually	Seed is planted in the ground and not affected by wind
High germination	Save on wasted seed
Heavy construction	Penetrates even the hardest ground. Machine can be used for longer periods. Increased germination
No damage to turf	Reseed during playing season
Metered feed	Controlled application, less waste
Low maintenance	Saving time



Redexim  
190031, Russia, St. Petersburg,  
Ulitsa Efimova 4a, Office 548-A  
Tel: +7 (812) 441-29-41  
Fax: +7 (812) 441-29-41  
www.redexim.ru  
E-mail: info@redexim.ru